

RESIDENTIAL ROOF COLORS

SIGNATURE® 200

STANDARD COLORS
26-GAUGE MATERIAL

Siliconized Polyester
Polar White is a Straight Polyester.

- Final color selection should be made from actual color chips.
- For the most current information available, visit our website www.customcompbldg.com
- See product catalog for gauge and color availability.
- A 40-year limited paint warranty is available upon written request for all colors except for Polar White, Regal White and Vintage White.

Slimline® Panel

29-GAUGE

			
COAL BLACK* SR .30 SRI 31	IVY GREEN* SR .28 SRI 30	BURNISHED SLATE* SR .28 SRI 29	BURGUNDY* SR .28 SRI 30
			
RUSTIC RED* SR .36 SRI 40	KOKO BROWN* SR .28 SRI 30	COBALT BLUE* SR .28 SRI 27	EVERGREEN SR .33 SRI 33
			
CHARCOAL GRAY* SR .28 SRI 30	HAWAIIAN BLUE* SR .32 SRI 35	BUCKSKIN* SR .34 SRI 38	DESERT SAND* SR .42 SRI 48
			
GRAY* SR .46 SRI 53	REGAL WHITE* SR .52 SRI 61	SADDLE TAN* SR .48 SRI 56	LIGHT STONE* SR .50 SRI 58
			
CLAY SR .41 SRI 45	POLAR WHITE* SR .58 SRI 69	SOLAR WHITE** SR .74 SRI 91	VINTAGE WHITE SR .64 SRI 76

* Also available in 26-gauge.

** Minimum quantities and/or extended lead times may be required. Please inquire.

5V Crimp

26-GAUGE

		
FERN GREEN* SR .28 SRI 29	MARINE GREEN SR .32 SRI 33	POLAR WHITE* SR .58 SRI 69



Custom Components & Buildings, Inc.
4245 Cascade Drive | Janesville WI 53546
Phone: 608.758.2736



* ENERGY STAR® Qualified

COLOR CHART

SOLAR REFLECTIVITY (SR)?

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. Energy Star requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes 3 years to complete, so not all products that meet the initial requirements are qualified. For more information, please go to www.energystar.gov.




Slimline® Panel

29-GAUGE



SOLAR REFLECTANCE INDEX (SRI)?

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to www.usgbc.org.

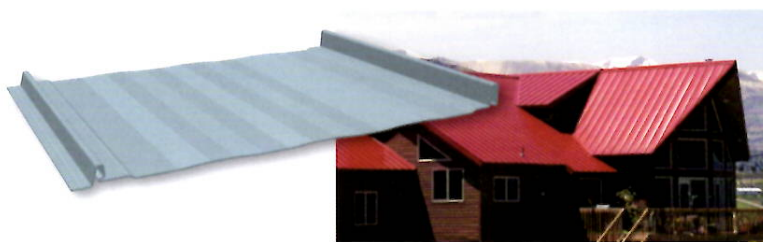


Stormproof® Panel

29-GAUGE



5V Crimp Panel

26-GAUGE

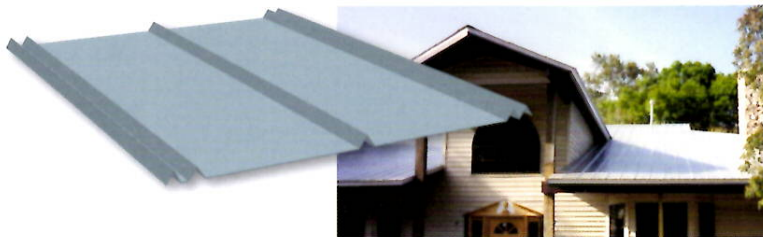

For complete performance specifications, product limitations and disclaimers, please consult CCB's Paint and Galvalume Plus® warranties. Upon receipt of payment in full, these warranties are available upon request for all painted or Galvalume Plus®, prime products.